


START TRIM Fibre Cement Trim

When Cladding your home, you want to make sure all the Boards are installed level. With the Cladco Fibre Cement Wall Cladding Start Trims, your Boards should be supported and aligned throughout your installation. Cladco Aluminum Start Trims are designed to sit at a slight angle, assisting the attractive feather boarding installation technique and providing the stand and support for the first Board to be fitted onto the structural Battens. Cladco Fibre Cement Wall Cladding Starter Strip should be installed at the wall's base, and above any doors or windows. The Start Trim should be installed above the Perforated Closure, with a 38mm Screw.

All Cladco Fibre Cement Wall Cladding Trims are available in a range of eight colours, manufactured to match the colour of your Cladco Fibre Cement Wall Cladding Boards for an attractive and seamless design. Trims do not require any staining or painting and are manufactured onsite using high-quality aluminium for a stain, rust and corrosion resistant product.

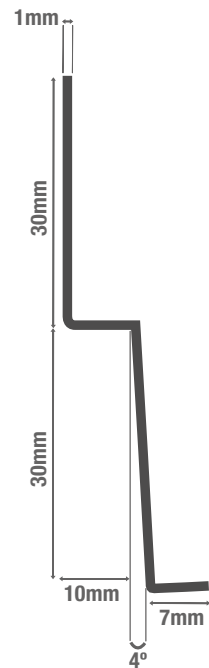

CLADCO TRIMS

SYMMETRIC EXTERNAL CORNER TRIM
Designed to fit on the corners of the building. Fibre Cement Wall Cladding Boards are installed to the flat edges of the Trim.

INTERNAL CORNER TRIM
Used in the internal corners of a building for a neat, seamless finish.

WALL END TRIM
Installed on the finishing edge to conceal exposed ends of Fibre Cement Wall Cladding Boards.

SINGLE & DOUBLE CONNECTION TRIMS
Installed to the inside edges of window reveals and door frames to support Boards.


PERFORATED CLOSURE
Installed under the Battens at the base of the build, or at the top of any doors and windows, to ensure ventilation throughout the installation. Perforated Closure also protects the build from any dirt or insects penetrating the air flow space.

START TRIM
Installed at the start of new Board runs at the base of the building.

ASYMMETRIC EXTERNAL CORNER TRIM
Designed to be installed on either side of the door or window, allowing Boards to be fitted on the flat surface of the Trim.

SPECIFICATIONS	
Length	3 metres
Thickness	1mm
Weight (approx)	1.53kg

COLOURS

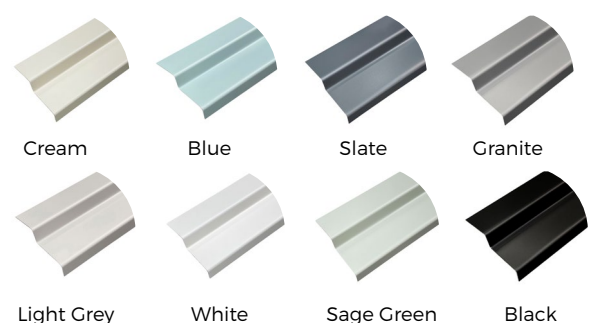

PLEASE NOTE - Images are used for illustration purposes only, actual item may vary slightly from the image supplied.



01837 659901 info@cladco.co.uk
www.cladcodecking.co.uk

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA

