



PERFORATED CLOSUREFibre Cement Trim

Cladco Perforated Closure is essential for your Fibre Cement Wall Cladding project. Perforated Closures have been manufactured with small holes at even spaces to encourage airflow and ventilation while also preventing animal and debris from entering. Cladco Perforated Closures are designed to be installed at the base of the project, supplying your building with an adequate airflow. The Perforated Closure is an crucial aspect of any Fibre Cement Wall Cladding project. Simply attach the Closures to the base of the Battens before installing the first Wall Cladding Board. Perforated Closures should also be fixed above any windows and doors where Fibre Cement Wall Cladding will be fitted.

Trims do not require any staining or painting, and are manufactured onsite using high-quality aluminium for a stain, rust and corrosion resistant product.



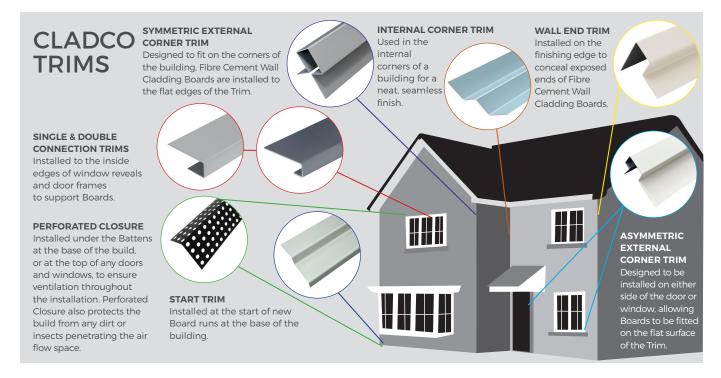

SPECIFICATIONS	
Length	3 metres
Size	40mm (w) x 30mm (h)
Thickness	1mm
Weight (approx)	0.5kg

PLEASE NOTE - Images are used for illustration purposes only, actual item may vary slightly from the image supplied.











