


BULLNOSE REVERSIBLE COMPOSITE DECKING


Cladco Bullnose Reversible Composite Decking features a solid core design for durability and strength around the perimeter of your Composite Decking area and steps. Bullnose Decking Boards are available in 4m lengths and in eight attractive colours to suit your area. Choose either a high-quality Woodgrain Effect or low-slip Narrow Grooves depending on your preference.

COLOUR RANGE

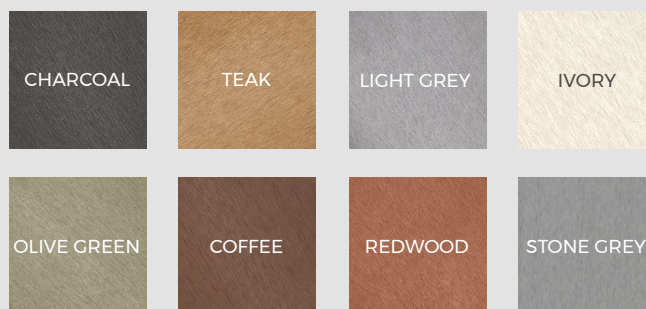

BOARD SPECIFICATIONS	
Length	4m
Width	150mm
Thickness	25mm
Coverage	0.6m ²
Weight	20.52kg

TEST CERTIFICATIONS	
FSC® Certification	SA-COC-005542
Fire Rating	CFL - s1 (EN 13501-1:2018)
Slip Resistance	DRY - Low-slip potential (Narrow Groove side) WET - Moderate slip potential (Narrow Groove side)

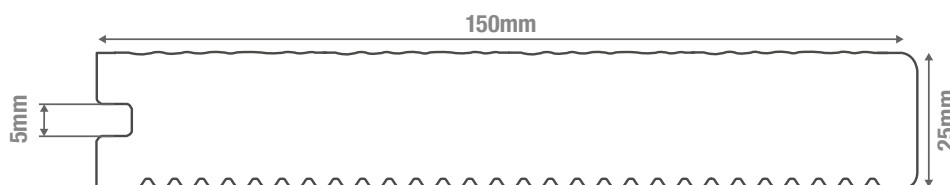



Woodgrain effect



Manufactured from 100% recycled materials



Install using T-Clips or hidden Clip System



Solid construction for increased strength



Designed with a curved edge to frame your decking



Narrow grooves provide a low-slip surface



MATERIALS

Composite wood-plastic mix comprising 60% hardwood fibres, 40% recycled plastics.



SURFACES

Choice of either a Woodgrain Effect or Narrow Grooves for your outdoor space.



ACCESSORIES

Complete your Cladco Decking® area with Composite Fascia Boards and Trims.



LOW MAINTENANCE

Unlike timber, Cladco Composite Decking Boards do not need to be sealed, stained or varnished.



GUARANTEEE

Cladco Composite Decking is supplied with a 10-Year Guarantee.

RECYCLED MATERIALS

Cladco Composite Decking is manufactured using 100% recycled materials, reducing our impact on the environment. A mix of 60% recycled hardwood fibres and 40% recycled, post-consumer plastics provides each Board with low-maintenance and long-lasting benefits.

Additional anti-UV agents, colour tints, bonding agents and additives are used to bind the materials to create a durable and fade resistant Composite Decking Board.

All Cladco Composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.

AFTERCARE

For standard everyday debris such as plants, leaves, berries, animal droppings, simply clear these away with a broom.

Avoid using grit or sand, as well as metal or plastic spades, on your Decking as they may scratch the surface.


INSTALLATION ADVICE

Hidden Finish

Ensure the Bullnose Board is supported along its entire length, with a Screw inserted into each Joist. Using 65mm Hidden Deck Fasteners, apply pressure using the supplied drill bit to compress the orange pad onto the surface of the Board to create space for the Plug. Composite Fascia Trims can conceal any exposed Joists.

Number of Screws

One row of Screws is recommended for each Board, inserted 13mm from the edges. We recommend using 11 Screws per 4m Board, with a T-Clip to secure internally. Alternatively, use 65mm SPEEDDEKZ Deck Screws inserted at an angle through the supporting Joist underneath the Board and finished with a Composite Skirting Trim.

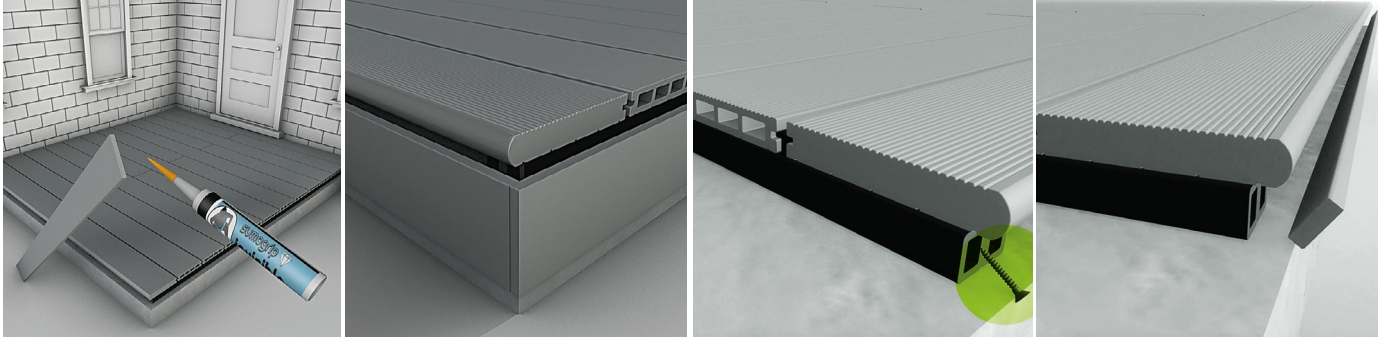

NATURAL WEATHERING

Cladco Composite Decking Boards are manufactured with the addition of an anti-UV agent to enhance durability and reduce the impact of sunlight exposure. However, due to the organic composition of these products, being predominantly timber-based, some natural weathering will still occur.


The extent and timeframe of weathering can vary based on the location and the exposure to sunlight that Composite Boards receive. This is a normal process and part of the natural character of the material.

For detailed information about installation, please read our Composite Decking Installation Guide.

PRODUCT ACCESSORIES




DECKING BOARDS




FASCIA BOARDS




CORNER TRIMS



SKIRTING TRIMS



COMPOSITE JOISTS



RECYCLED
PLASTIC JOISTS



STAINLESS STEEL
CLIPS AND SCREWS
11 required per 4m Board



T-CLIP FIXINGS
AND SCREWS
11 required per 4m Board



SPEEDDEKZ 316
DECKING SCREWS



65MM HIDDEN
FASTENING SCREWS