



WOODGRAIN REVERSIBLE COMPOSITE DECKING

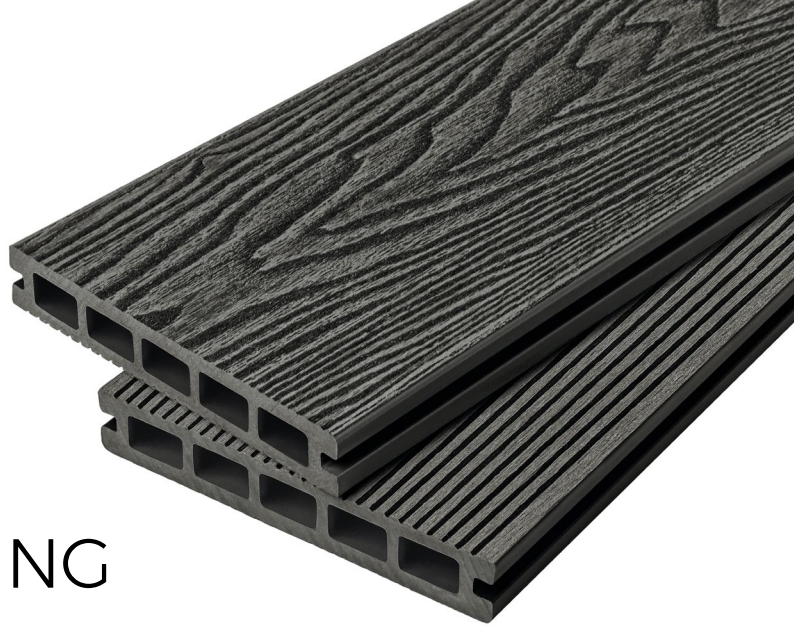

Cladco Woodgrain Effect Reversible Composite Decking features a five-hole honeycomb design for enhanced strength and ease of handling. Composite Decking Boards are available in 2.4m and 4m lengths, and in eight attractive colours to suit your project. Durable and versatile, Composite Decking offers a stylish solution for outdoor spaces.

COLOUR RANGE

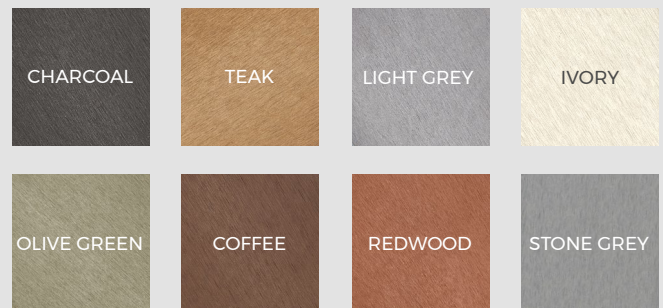


BOARD SPECIFICATIONS

Length	2.4m & 4m
Width	150mm
Thickness	25mm
Coverage	0.36m ² (2.4m) 0.6m ² (4m)
Weight	6.72kg (2.4m) 11.2kg (4m)

TEST CERTIFICATIONS

FSC® Certification	SA-COC-005542
Fire Rating	DFL – s1 (EN 13501-1:2018)
Slip Resistance	DRY - Low-slip potential (Grooved side) WET - Moderate slip potential (Grooved side)

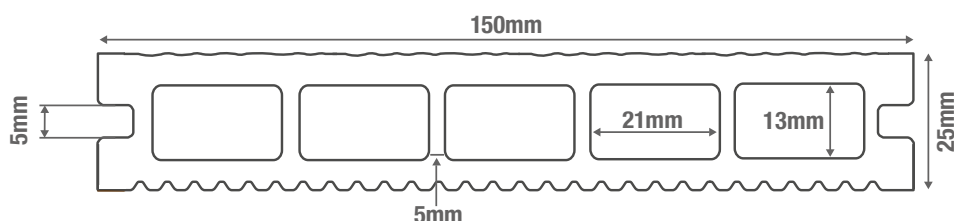



Woodgrain effect



Manufactured from 100% recycled materials



Five-hole construction for increased strength



Install using T-Clips or hidden Clip System



Narrow grooves provide a low-slip surface



MATERIALS

Composite wood-plastic mix comprising 60% hardwood fibres, 40% recycled plastics.



SURFACES

Choice of either a Woodgrain Effect or low-slip Grooves for your outdoor space.



ACCESSORIES

Complete your Cladco Decking® area with Composite Bullnose Boards and Trims.



LOW MAINTENANCE

Unlike timber, Cladco Composite Decking Boards do not need to be sealed, stained or varnished.



GARANTEE

Cladco Composite Decking is supplied with a 15-Year Guarantee.

RECYCLED MATERIALS

Cladco Composite Decking is manufactured using 100% recycled materials, reducing our impact on the environment. A mix of 60% recycled hardwood fibres and 40% recycled, post-consumer plastics provides each Board with low-maintenance and long-lasting benefits.

Additional anti-UV agents, colour tints, bonding agents and additives are used to bind the materials to create a durable and fade resistant Composite Decking Board.

All Cladco Composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.

AFTERCARE


For standard everyday debris such as plants, leaves, berries and animal droppings, simply clear these away with a broom.

Avoid using grit or sand, as well as metal or plastic spades, on your Decking as they may scratch the surface.

INSTALLATION ADVICE


Joist Spacing

Cladco Composite Decking Joists can be worked with normal woodworking tools and are easily fastened to a suitable supporting Joist substructure, installed with a maximum Joist spacing of 40cm.

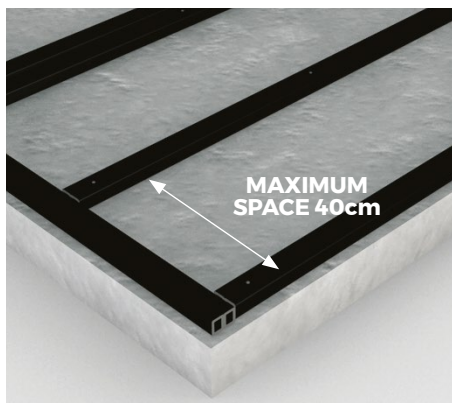


Starter Clips

Starter Clips need to be fixed to the end of the Composite Joists before laying the first Board. Leave a gap of 15mm between walls and Joists to allow for expansion.

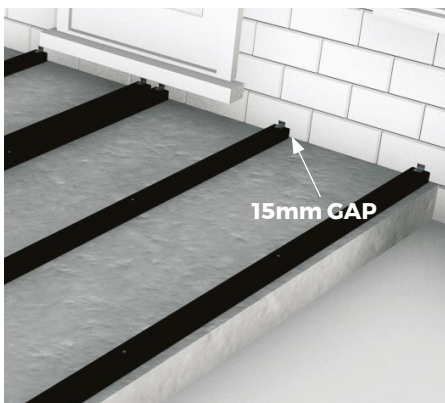

Board Spacing

Cladco Composite Decking T-Clips ensure Boards are easy to install with a suitable gap. Alternatively, use Cladco Stainless Steel Hidden Clips for a minimal 2-3mm gap between Composite Boards.

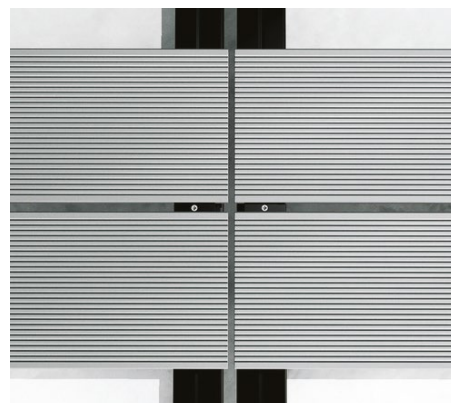

NATURAL WEATHERING

Cladco Composite Decking Boards are manufactured with the addition of an anti-UV agent to enhance durability and reduce the impact of sunlight exposure. However, due to the organic composition of these products, being predominantly timber-based, some natural weathering will still occur.


The extent and timeframe of weathering can vary based on the location and the exposure to sunlight that Composite Boards receive. This is a normal process and part of the natural character of the material.

For detailed information about installation, please read our Composite Decking Installation Guide.

PRODUCT ACCESSORIES




BULLNOSE BOARDS




FASCIA BOARDS




CORNER TRIMS



SKIRTING TRIMS



COMPOSITE JOISTS



**RECYCLED
PLASTIC JOISTS**



**STAINLESS STEEL
CLIPS AND SCREWS**
11 required per 4m Board



**T-CLIP FIXINGS
AND SCREWS**
11 required per 4m Board



**STAINLESS STEEL
STARTER CLIPS**



**HOLLOW DECKING
END CAPS**