



GROOVED BAMBOO HARDWOOD DECKING

Cladco Bamboo Hardwood Decking has exceptional strength and durability which can be utilised in a variety of domestic and commercial applications. Our Bamboo Decking Boards are available in 2.4m and 3m lengths, and provide a highly sustainable Decking material.

COLOUR RANGE




BOARD SPECIFICATIONS

Length	2.4m & 3m
Width	140mm
Thickness	20mm
Coverage	0.34m ² (2.44m) 0.43m ² (3.05m)
Weight	7.66kg (2.44m) 9.58kg (3.05m)

TEST CERTIFICATIONS

FSC® Certification	SA-COC-005542
Fire Rating	BFL - s1 (EN 13501-1)
Slip Resistance	DRY - Low-slip potential WET - Low-slip potential
Formaldehyde Emission	E1 (EN 717-1:2004)

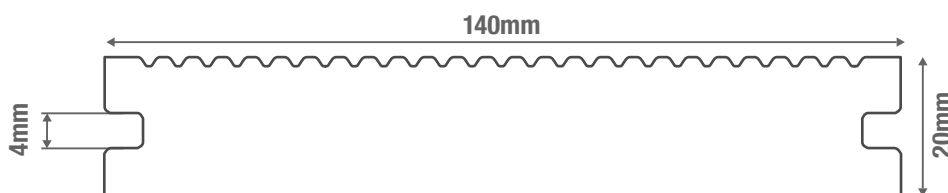



Made With Sustainable Materials



Solid Board With Superior Durability And Strength



Grooved Surface Provides Low Slip



Simple Installation With Fixing Clips



MATERIALS

Made from bamboo plants, which is a sustainable and renewable resource.



SURFACES

Double-sided Board with a narrow grooved finish or smooth finish on alternate side.



ACCESSORIES

Install your Bamboo Decking seamlessly and securely with Starter Clips and a Fixing Clip system.



RESISTANCE

Unlike softwood timber, Bamboo Hardwood Decking is resistant to staining and scratching.



WARRANTY

Cladco Bamboo Decking comes with a 10-year supplier's warranty, when installed with our Clips.

SUSTAINABLE MATERIALS

Cladco Bamboo Hardwood Decking is manufactured from natural bamboo and formed by a combination of high pressure and heat to ensure all pests and insects are removed from the organic materials. Bamboo Hardwood Decking offers superior durability compared to softwood timber decking boards on the market, with greater sustainability within its production.

Cladco Bamboo Hardwood Decking is available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.

AFTERCARE

For standard everyday debris such as plants, leaves, berries and animal droppings, simply clear these away with a broom and then wash the Decking with water.


Avoid using grit or sand, as well as metal or plastic spades, on your Decking as they may scratch the surface.

It is recommended to re-oil Bamboo Decking every 6-12 months to protect the hardwood surface.

INSTALLATION ADVICE


Joist Spacing

Cladco Bamboo Decking Boards can be worked with normal woodworking tools and are easily fastened to a suitable supporting Joist substructure, installed with a maximum Joist spacing of 450-500mm.

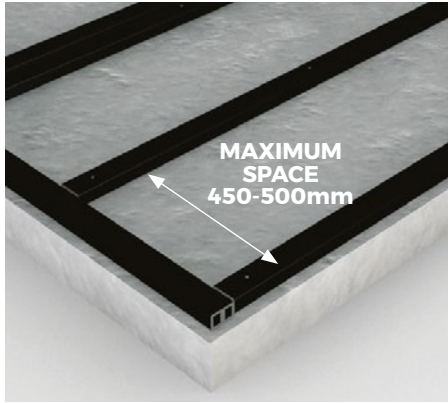

Starter Clips

Starter Clips need to be fixed to the end of Joists before laying the first Bamboo Decking Board. Leave a gap of 15mm between walls/fences and Joists to allow for expansion.

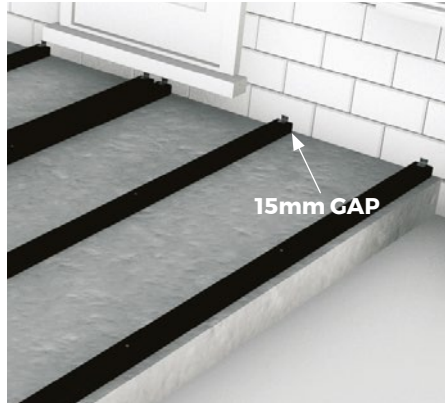

Board Spacing

Cladco Bamboo Decking Fixing Clips ensure Boards are easy to install with a suitable gap. Each Board should be held into place with a Fixing Clip where two Board ends meet. Allow 2mm of spacing between butt joints.




NATURAL WEATHERING

Due to the organic composition of these products, being predominantly wood-based, some natural weathering will still occur.


The extent and timeframe of weathering can vary based on the location and the exposure to sunlight that Bamboo Decking receives. This is a normal process and part of the natural character of the material. To preserve the colour and finish of Bamboo Decking you will need to regularly re-oil the surface with a water-based oil product.

For detailed information about installation, please read our Installation Guide.


PRODUCT ACCESSORIES



COMPOSITE JOISTS



RECYCLED PLASTIC JOISTS



RECYCLED PLASTIC POSTS



BAMBOO DECKING FIXING CLIPS AND SCREWS



BAMBOO DECKING STARTER CLIPS AND SCREWS