

## SINGLE CONNECTION TRIM

### Fibre Cement Lap Trim


Cladco Fibre Cement Lap Aluminium Connection Profile Trim is designed to wraparound a single Fibre Cement Lap Board's edge and either a soffit, window or door reveal. The Trim is often used to finish feather boarding Wall Cladding installations.

Cladco Fibre Cement Lap Connection Profiles are manufactured with a slight lip, which perfectly fits a Cladco Fibre Cement Lap Wall Cladding Board and can be installed using Cladco Fibre Cement 38mm Screws.

Protecting your Board's edges from the elements, the Trims also allow your Wall Cladding Board to be fitted closer to the edge of your wall.

All Cladco Fibre Cement Lap Wall Cladding Trims are available in a range of seven colours, manufactured to match the colour of your Cladco Fibre Cement Lap Wall Cladding Boards for an attractive and seamless design.

Trims do not require any staining or painting, and are manufactured onsite using high-quality aluminium for a stain, rust and corrosion resistant product.

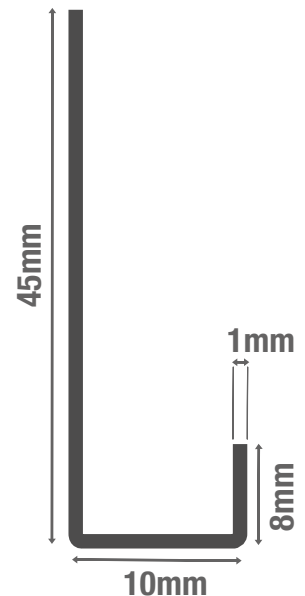

### CLADCO TRIMS

**SYMMETRIC EXTERNAL CORNER TRIM**  
Designed to fit on the corners of the building, Fibre Cement Lap Wall Cladding Boards are installed to the flat edges of the Trim.

**INTERNAL CORNER TRIM**  
Used in the internal corners of a building for a neat, seamless finish.

**WALL END TRIM**  
Installed on the finishing edge to conceal exposed ends of Fibre Cement Lap Wall Cladding Boards.

**SINGLE & DOUBLE CONNECTION TRIMS**  
Installed to the inside edges of window reveals and door frames to support Boards.


**PERFORATED CLOSURE**  
Installed under the Battens at the base of the build, or at the top of any doors and windows, to ensure ventilation throughout the installation. Perforated Closure also protects the build from any dirt or insects penetrating the air flow space.

**START TRIM**  
Installed at the start of new Board runs at the base of the building.

**ASYMMETRIC EXTERNAL CORNER TRIM**  
Designed to be installed on either side of the door or window, allowing Boards to be fitted on the flat surface of the Trim.

SPECIFICATIONS	
Length	3 metres
Thickness	1mm
Weight (approx)	1.53kg

### COLOURS

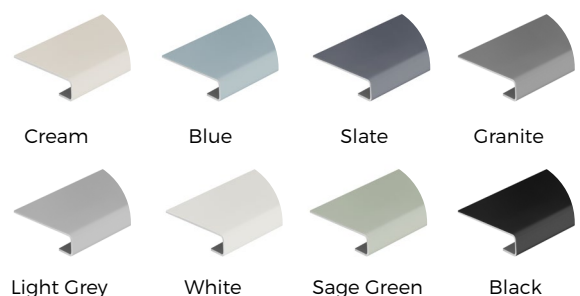

**PLEASE NOTE** – Images are used for illustration purposes only, actual item may vary slightly from the image supplied.



01837 659901 [info@cladco.co.uk](mailto:info@cladco.co.uk)  
[www.cladcodecking.co.uk](http://www.cladcodecking.co.uk)

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA

