

3.6M BULLNOSE NORDECK WOODGRAIN EFFECT DECKING



Cladco Nordeck Woodgrain Effect Bullnose Boards are used alongside Nordeck Decking Boards to add a neat, curved edge. Nordeck Boards are made using PVC-ASA materials, providing resistance against fading, staining or scratching. Nordeck Bullnose Boards have a luxurious textured finish with a natural wood effect and come in six contemporary colours. Nordeck Decking benefits from a 20-year structural warranty.

*When installed with Cladco Recycled Plastic Joists.

COLOUR RANGE





BOARD SPECIFICATIONS






Length	3.6m
Width	150mm
Thickness	32mm
Weight	11.16kg

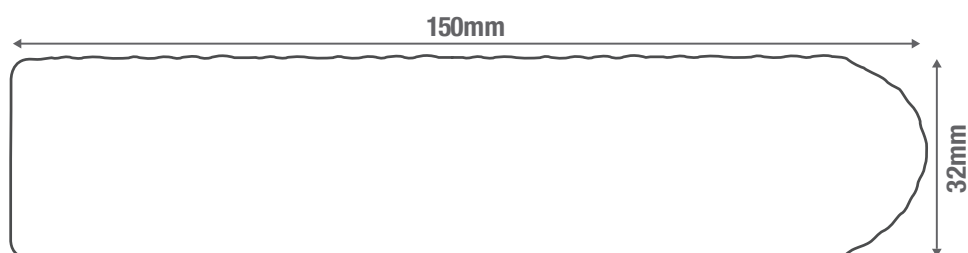TEST CERTIFICATIONS

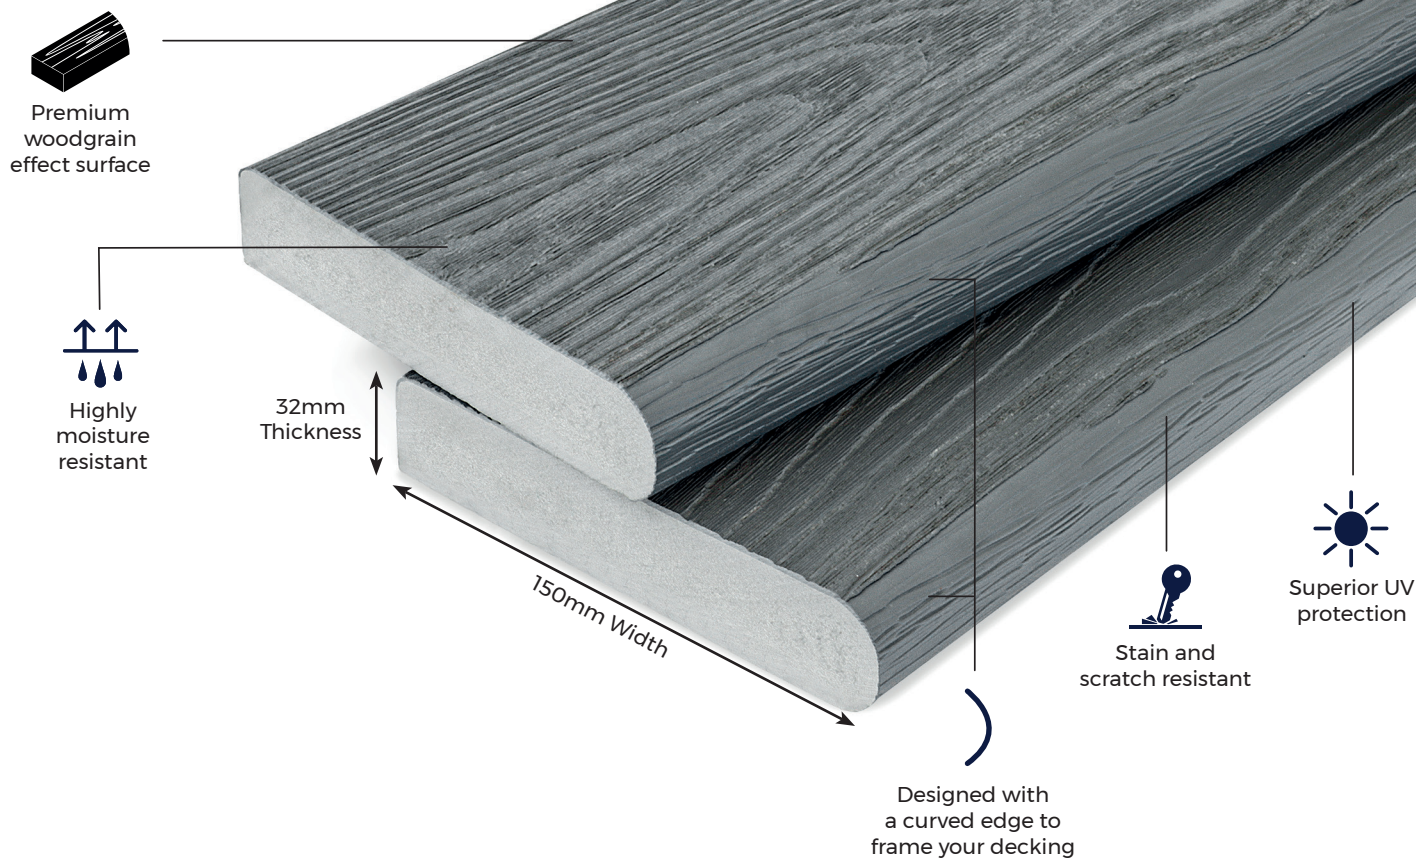Slip Resistance	DRY - Low-slip potential WET - Low-slip potential
-----------------	--





 <p>MATERIALS</p> <p>Made from a strong PVC core encased in a resilient ASA resin shell for durability.</p>	 <p>SURFACES</p> <p>Featuring a premium, embossed Woodgrain Effect surface to replicate timber.</p>	 <p>ACCESSORIES</p> <p>Install Nordeck Bullnose Boards using either Hidden Deck Fasteners or CTI Adhesive.</p>	 <p>RESISTANCE</p> <p>Unlike timber, Nordeck Decking is resistant to stains, scratches, UV and moisture damage.</p>	 <p>WARRANTY</p> <p>Cladco Nordeck Bullnose Boards come with a 20-Year Warranty.</p>
---	---	--	---	--

PVC-ASA MATERIAL

Cladco Nordeck Woodgrain Effect Decking is composed of a dense PVC core encased in an ASA resin, providing superior resilience against weather, scratching, UV fading and rot damage.

The tough PVC-ASA Capstock material is suitable for use low to the ground or in damp areas, such as around pools or hot tubs, due to its moisture resistant properties.

Nordeck Woodgrain Effect Decking is highly resistant to general wear and tear, and also resists stains or scratches. Nordeck Woodgrain Effect Decking has a

remarkable natural wood effect look and feel due to its embossed surface. This type of decking is extremely UV resistant and maintains its original colour after sun exposure.

AFTERCARE

Cladco Nordeck Woodgrain Effect Decking is low maintenance and easy to clean with soapy water when needed. Pressure washers can be used occasionally, keeping a distance of 250mm-300mm away from the surface. By following these methods, your Nordeck Decking Boards will look exceptional for years to come.

INSTALLATION ADVICE

Lay your Decking

After completing the main structure of your Decking, you may choose to install Nordeck Bullnose Boards for a seamless finish. These Boards will be fixed around the framework.




Install using SPEEDDEKZ Deck Screws

You may choose to install Nordeck Bullnose Boards using SPEEDDEKZ Deck Screws. This method will leave the Screws visible on the surface of the Boards.


Install using Hidden Deck Fasteners

For a hidden finish, install Nordeck Woodgrain Effect Bullnose Boards using Cladco Hidden Deck Fasteners. These include 65mm Screws and colour plugs that cover over the Screw's head.

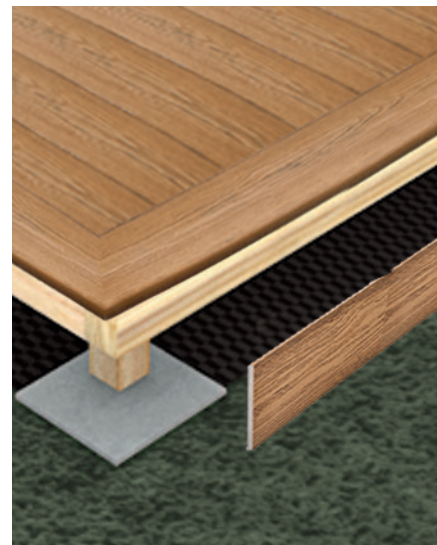

For detailed information about installation, please read our Nordeck Woodgrain Effect Decking Installation Guide.

PRODUCT ACCESSORIES

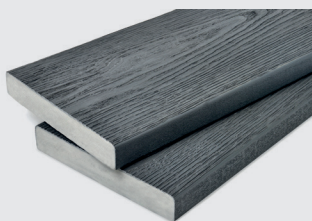

DECKING BOARDS



FASCIA BOARDS



CTI ADHESIVE



COMPOSITE JOISTS



TIMBER JOISTS



WEED MAT & PINS BUNDLE



SPEEDDEKZ 316
STAINLESS STEEL
SCREWS



MAGNETIC
PHILLIPS IMPACT
SCREWDRIVER BITS



65MM HIDDEN DECK
FASTENERS