



# 3.6M FASCIA

## NORDECK WOODGRAIN EFFECT DECKING

Cladco Nordeck Woodgrain Effect Fascia Boards are used alongside Nordeck Woodgrain Effect Decking Boards to hide the structural base, creating a seamless finish. Made with extremely resilient PVC-ASA materials providing resistance against fading, staining or scratching, Fascia Boards have a premium natural wood effect. Nordeck Decking is available in six contemporary colours and benefits from a 20-year warranty.


\*When installed with Cladco Recycled Plastic Joists.

### COLOUR RANGE



BOARD SPECIFICATIONS	
Length	3.6m
Width	140mm
Thickness	15mm
Weight	5.08kg

TEST CERTIFICATIONS	
Slip Resistance	<b>DRY</b> - Low-slip potential <b>WET</b> - Low-slip potential

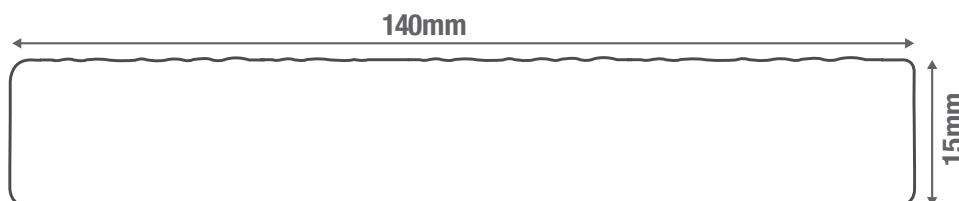



Premium woodgrain effect surface

140mm Width



Highly moisture resistant

15mm Thickness



Superior UV protection



Stain and scratch resistant



#### MATERIALS

Made from a strong PVC core encased in a resilient ASA resin shell for durability.



#### SURFACES

Featuring a premium, embossed Woodgrain Effect surface to replicate timber.



#### ACCESSORIES

Install Nordeck Fascia Boards using either Hidden Deck Fasteners or CTI Adhesive.



#### RESISTANCE

Unlike timber, Nordeck Decking is resistant to stains, scratches, UV and moisture damage.



#### WARRANTY

Cladco Nordeck Woodgrain Effect Fascia Boards come with a 20-Year Warranty.

## PVC-ASA MATERIAL

Cladco Nordeck Woodgrain Effect Decking is composed of a dense PVC core encased in an ASA resin, providing superior resilience against weather, scratching, UV fading and rot damage.

The tough PVC-ASA Capstock material is suitable for use low to the ground or in damp areas, such as around pools or hot tubs, due to its moisture resistant properties.

Nordeck Woodgrain Effect Decking is highly resistant to general wear and tear, and also resists stains or scratches. Nordeck Woodgrain Effect Decking has a

remarkable natural wood effect look and feel due to its embossed surface. This type of decking is extremely UV resistant and maintains its original colour after sun exposure.


## AFTERCARE

Cladco Nordeck Woodgrain Effect Decking is low maintenance and easy to clean with soapy water when needed. Pressure washers can be used occasionally, keeping a distance of 250mm-300mm away from the surface. By following these methods, your Nordeck Decking Boards will look exceptional for years to come.

## INSTALLATION ADVICE

### Lay your Decking

After completing the main structure of your Decking, you may choose to install Fascia Boards for a seamless finish. These Boards will be fixed onto the sides of your Decking area.

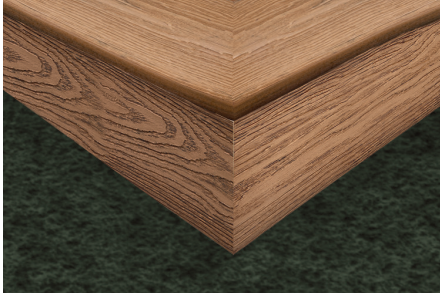

### Install using SPEEDDEKZ Deck Screws

Install Nordeck Fascia Boards using SPEEDDEKZ Deck Screws or Hidden Deck Fasteners. The ends of the Fascia Boards should be fixed to the joists behind and inserted 13mm away from the edge of the Board.


### Install using CTI Adhesive

You may choose to install the Fascia Boards using CTI Adhesive. We recommend alternating Screws and Adhesive for the best results when securing Nordeck Fascia Boards.




For detailed information about installation, please read our Nordeck Woodgrain Effect Decking Installation Guide.

## PRODUCT ACCESSORIES




DECKING BOARDS

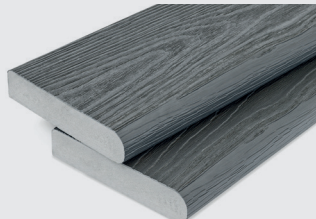

BULLNOSE BOARDS



CTI ADHESIVE

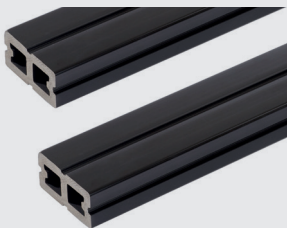

COMPOSITE JOISTS



TIMBER JOISTS



WEED MAT & PINS BUNDLE



SPEEDDEKZ 316 STAINLESS STEEL SCREWS



MAGNETIC PHILLIPS IMPACT SCREWDRIVER BITS



65MM HIDDEN DECK FASTENERS