

# 4M PRODECK CAPPED COMPOSITE BULLNOSE BOARD




These Capped Composite Bullnose Boards are perfect for finishing your ProDeck Decking project. With an low slip narrow groove surface, the Capped Composite Boards offer durability and resistance to staining, splintering, rotting and colour fading due to UV exposure. The polymer capped Boards are available in six versatile colours that can be used to compliment or contrast your Decking installation.

# **COLOUR RANGE**



BOARD SPECIFICATIONS	
Length	4m
Width	150mm
Thickness	23mm
Weight	16kg (approx)






\*When installed with Cladco Recycled Plastic Joists and in accordance with our Installation Guide. For warranty terms, please visit our website.





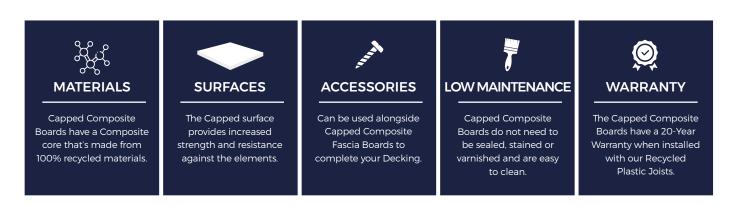

## **RECYCLED MATERIALS**

Cladco ProDeck Capped Composite Boards have a core made from 100% recycled materials. The Composite core is a mix of 60% recycled hardwood fibres and 40% recycled post-consumer plastics to help reduce our environmental impact.

Our ProDeck range takes our Composite Decking core and caps it with a polymer protective shell to increase the Board's resilience. The subsequent Decking Board is more resistant to weather conditions, scratching, staining and fading due to UV rays.

All Cladco Composite products are available as FSC® certified for the same cost. If you require

FSC® certified products, please ask for these when placing your order.

## **AFTERCARE**

Cladco ProDeck Capped Composite Boards may naturally accumulate dirt over time due to outdoor conditions. For everyday debris such as plants, leaves, berries or animal droppings, simply brush your Decking with a broom.

In cases of more stubborn dirt or grime, using warm soapy water may be necessary to restore the Decking's appearance.



## **INSTALLATION ADVICE**


### **Bullnose Finish**

Please note that Bullnose Boards are intended for use as borders around your Capped Composite Decking area. Due to natural batch variations and the timber within the Boards, they are not designed to blend seamlessly with the rest of your Capped Composite Decking. For an enhanced aesthetic, we recommend choosing a contrasting colour to create a picture frame effect.

### **Number of Screws**

Fit the ProDeck Board over the Starter/Bullnose Clips and push forward until flush. They can then be secured in place with T-Clips as required before continuing to install the rest of your standard ProDeck Capped Composite Boards.





Adhering to these guidelines will help ensure proper installation and longevity of your Capped Composite Decking.

Failure to follow these guidelines will invalidate the product's warranty.


# **TEMPERATURE EXPANSION**

The capped shell surface of the Composite core means that the Boards are less likely to be effected by temperature changes. It means that the Capped Composite Bullnose Boards are more resistant to expansion or retraction due to heat and cold, making it a very stable option.

The polymer shell also provides protection against weather conditions and increased insulating properties. This improved thermal performance helps regulate indoor temperatures and reduce heating and cooling costs.

For detailed information about installation, please read our ProClad Wall Cladding Installation Guide.

# **PRODUCT ACCESSORIES**




PRODECK DECKING BOARDS



CAPPED COMPOSITE CORNER TRIM



CAPPED COMPOSITE FASCIA BOARDS



RECYCLED PLASTIC BATTENS



COMPOSITE BATTENS

