

PRODECK DUAL-SIDED CAPPED

COMPOSITE DECKING




ProDeck Capped Composite
Decking Boards are reversible,
with a stain and fade resistant
polymer shell. Available in a choice
of six multi-tonal colours, ProDeck
combines durability with versatility.
One side features a detailed
woodgrain effect, while the other
has narrow grooves for enhanced
low-slip properties. ProDeck Boards
come in two lengths - 2.4m and 4m.

COLOUR RANGE



BOARD SPECIFICATIONS	
Length	2.4m & 4m
Width	143mm
Thickness	23mm
Coverage	0.36m² (2.4m) 0.6m² (4m)
Weight	16kg (approx)






In accordance with our Installation Guide, the Capped Composite Boards have a 15-Year Warranty when used alongside our Composite Decking Joists and a 20-Year Warranty when installed with Cladco Recycled Plastic Joists. Our Warranty terms can be found on our website.





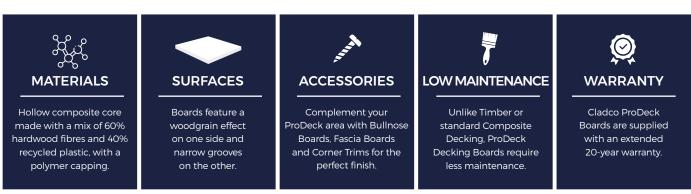

TEMPERATURE EXPANSION

The capped surface of the Composite core means that Boards are less likely to be effected by temperature changes. It means that the ProDeck is more resistant to expansion or contraction due to heat and cold, making it a very stable option.

RECYCLED MATERIALS

Cladco ProDeck Boards have a core made from 100% recycled materials. The Composite core is a mix of 60% recycled hardwood fibres and 40%

recycled post-consumer plastics to help reduce our environmental impact.

Our ProDeck range has a polymer protective shell to increase the Board's resistance to weather conditions, scratching, staining and fading due to UV rays.

All Cladco Composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.



INSTALLATION ADVICE

Starter Clips


ProDeck Bullnose/Starter Clips need to be fixed to the end of the Joists before laying the first Board, leaving a gap of at least 10mm between any walls and the Starter Clip.


Expansion Gap


Do not allow ProDeck Capped Composite Boards to meet at the ends. T-Clips will leave a 7mm expansion gap between each Board to allow for expansion and contraction in temperature changes. It is not recommended that Boards are installed in temperatures below 5-degrees.

Last Boards

For the final two Boards, measure the width of both Boards together (including the 7mm expansion gap) to discover where the outer edge of the final Board will lie and mark out with a pencil on the below joists. Use this mark to fit the final Bullnose/Starter Clips and slot the last Board into place using these Clips.







Adhering to these guidelines will help ensure proper installation and longevity of your Capped Composite Decking. Failure to follow these guidelines will invalidate the product's warranty.


AFTERCARE

Cladco ProDeck Capped Composite Boards may naturally accumulate dirt over time due to outdoor conditions. For everyday debris such as plants, leaves, berries or animal droppings, simply brush your Decking with a broom.

In cases of more stubborn dirt or grime, using warm soapy water may be necessary to restore the Decking's appearance.

For detailed information about installation, please read our ProClad Wall Cladding Installation Guide.

PRODUCT ACCESSORIES



PRODECK BULLNOSE BOARDS



PRODECK FASCIA BOARDS



CAPPED CORNER TRIMS



PRODECK T-CLIP FIXINGS



RECYCLED PLASTIC JOISTS

