

4.8M TIMBER BATTEN CLADDING FRAME



Create a sturdy support system for external wall cladding with Cladco pressure-treated timber battens, available in 4.8m lengths. Treated with Tanalith[®] E wood preservative, these green-treated timber battens offer long-lasting durability, making them ideal for a wide range of exterior building projects.



MADE FROM SUSTAINABLY-SOURCED WOOD




GREEN TREATED FOR INCREASED PROTECTION FROM THE ELEMENTS



CAN BE USED WITH MULTIPLE CLADDING BOARD TYPES


BATTEN SPECIFICATIONS	
SKU	TIM1001003
Length	4.8m
Dimensions	50mm x 25mm
Weight	2.5kg (Approx.)



Please Note: Images are used for illustration purposes only, actual item may vary slightly from the image supplied.





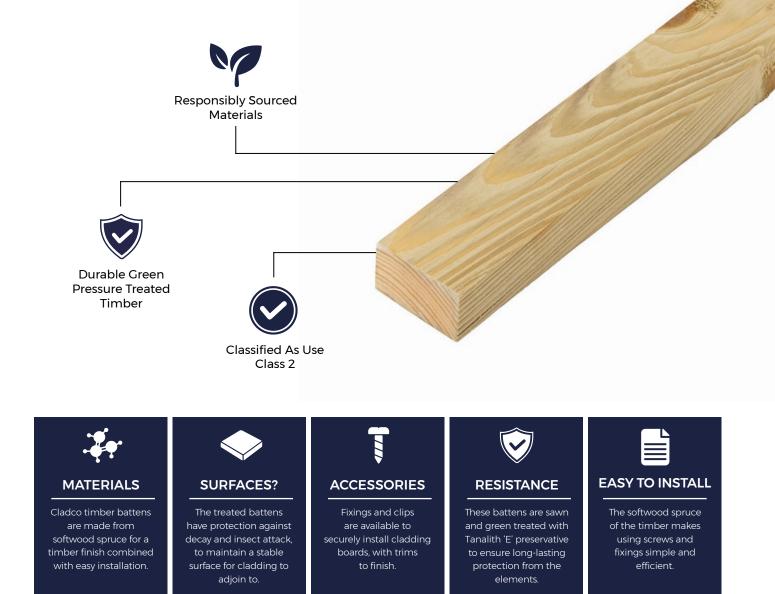

INSTALLATION ADVICE

Ensure that the installation surface is flat and stable. Then pre-drill both the timber battens and the surface.

Horizontal Installation: Secure battens running vertically at a maximum distance of 500mm apart.

Vertical Installation:

Battens should be horizontally installed, again a maximum of 500mm apart.

For full installation guidance, please refer to our online cladding installation guides.

PRODUCT ACCESSORIES



SIGNATURE COMPOSITE CLADDING BOARDS



SIGNATURE WOODGRAIN COMPOSITE CLADDING BOARDS



PROCLAD COMPOSITE WALL CLADDING BOARDS



M4X40MM STAINLESS STEEL WOOD SCREWS



www.cladco.co.uk **T:** 01837 659901 **E:** info@cladco.co.uk

